

# Linear guideways

## EG/QE series

### 3.3 EG/QE series


#### 3.3.1 Properties of the EG and QE series linear guideways

Flat type, specially for applications with limited installation space. The HIWIN linear guideways of the EG series with four ball tracks are well-suited for applications with tight installation space due to their low installation height. Nevertheless, the EG series has the same properties as the HG series: high load capacity, low displacement forces and high efficiency. The ball retainers prevent the balls from falling out when pulled from the profile rail during installation of the blocks.

The models of the QE series with SynchMotion™ technology offer all the advantages of the standard EG series. Controlled movement of the balls at a defined distance also results in improved synchronous performance, higher reliable travel speeds, extended lubrication intervals and less running noise. Since the installation dimensions of the QE blocks are identical to those of the EG blocks, they are also mounted on the EGR standard rail and can thus be easily interchanged. For further information, see Page 24.

#### 3.3.2 Layout of EG/QE series


- Four-row recirculating ball bearing guide
- 45° contact angle of the ball tracks
- The ball retainers prevent the balls from falling out when the block is removed
- Different sealing variants, depending on application area
- 6 connection options for lubricating nipples or lubrication adapters
- SynchMotion™ technology (QE series)

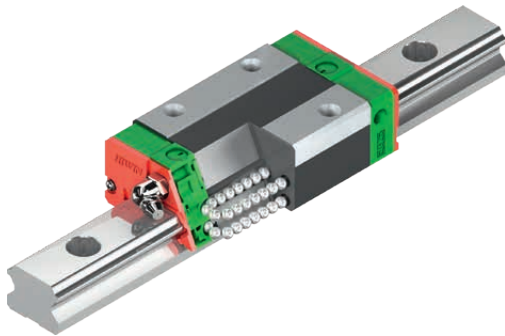

Layout of EG series

#### Advantages:

- Backlash-free
- Exchangeable
- High accuracy
- Highly resilient in all loading directions
- Low friction losses even with preload from optimised ball tracks and 2-point contact

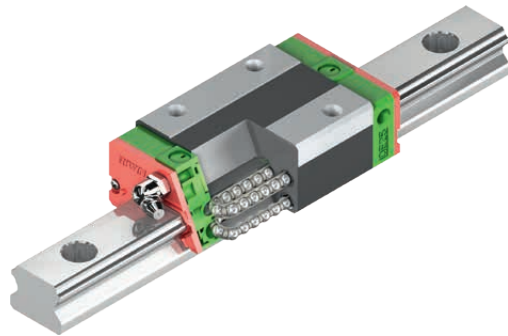

Layout of QE series

#### Additional advantages of QE series:

- Improved synchronous performance
- Optimised for higher travel speeds
- Extended relubrication intervals
- Reduced running noise
- Higher dynamic load rating

#### 3.3.3 Order codes of EG/QE series

For EG/QE linear guideways, there is a distinction made between assembled and non-assembled models. The dimensions of both models are the same. The main difference is that, in the unassembled models, blocks and profile rails can be freely interchanged. Block and profile rail can be ordered separately and mounted by the customer. Their accuracy reaches class P.

## Order code for linear guideway (assembled)

|    |   |    |   |   |   |   |      |    |   |   |    |    |     |
|----|---|----|---|---|---|---|------|----|---|---|----|----|-----|
| EG | W | 25 | C | C | 2 | R | 1600 | ZA | H | 2 | DD | E2 | CTS |
|----|---|----|---|---|---|---|------|----|---|---|----|----|-----|

**Series:** EG, QE  
**Type:** W: Flange block, H: Square block  
**Size:** EG: 15, 20, 25, 30, 35; QE: 15, 20, 25, 30, 35  
**Load class:** S: Average load, C: Heavy load  
**Block fastening:** A: From above, C: From above or below  
**Number of blocks per profile rail**  
**Profile rail mounting:** R: From above, T: From below, U: From above with large assembly hole (EG/QE15, EG/QE30)  
**Coating:** None: No coating, CTS, CZS, CCB  
**Dust protection<sup>2)</sup>:** None: Standard, E2: Long-term lubrication unit, SE: Steel deflector<sup>3)</sup>  
**Dust protection<sup>2)</sup>:** None: Standard (SS), ZZ, DD, KK  
**Rails per axis<sup>1)</sup>**  
**Accuracy class:** C, H, P, SP, UP  
**Preload identifier:** Z0, ZA, ZB  
**Profile rail length [mm]**

## Order number of block (not assembled)

|    |   |    |   |   |    |   |    |    |
|----|---|----|---|---|----|---|----|----|
| EG | W | 25 | C | C | Z0 | H | ZZ | E2 |
|----|---|----|---|---|----|---|----|----|

**Series:** EG, QE  
**Type:** W: Flange block, H: Square block  
**Size:** EG: 15, 20, 25, 30, 35; QE: 15, 20, 25, 30, 35  
**Load class:** S: Average load, C: Heavy load  
**Dust protection<sup>2)</sup>:** None: Standard (SS), ZZ, DD, KK  
**Accuracy class:** C, H, P  
**Preload identifier:** Z0, ZA, ZB  
**Block fastening:** A: From above, C: From above or below  
**Coating:** None: Standard, E2: Long-term lubrication unit

## Order number of profile rail (not assembled)

|    |   |    |   |      |   |     |
|----|---|----|---|------|---|-----|
| EG | R | 25 | R | 1200 | H | CTS |
|----|---|----|---|------|---|-----|

**EG series**  
**Profile rail**  
**Size:** 15, 20, 25, 30, 35  
**Coating:** None: No coating, CTS, CZS, CCB  
**Accuracy class:** C, H, P  
**Profile rail length [mm]**  
**Profile rail mounting:** R: From above, T: From below, U: From above with large assembly hole (EG/QE15, EG/QE30)

Note:

<sup>1)</sup> The number 2 is also a quantity indication, i.e. one piece of the article described above consists of one pair of rails.

No number is given for single profile rails. In the case of multi-part rails, the joint is offset as standard.

<sup>2)</sup> An overview of the individual sealing systems can be found on Page 22



<sup>3)</sup> Only available for EG 20 and EG 25

# Linear guideways

EG/QE series



## 3.3.4 Block types

HIWIN offers block and flange blocks for its linear guideways. Due to the low installation height and the larger mounting surface, flange blocks are better suited for large loads.
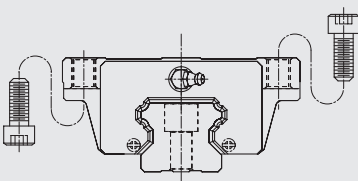
| Table 3.40 Block types |                  |                                                                                   |             |                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------|------------------|-----------------------------------------------------------------------------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type                   | Series/size      | Layout                                                                            | Height [mm] | Typical applications                                                                                                                                                                                                                                                                                                                                                      |
| Square type            | EGH-SA<br>EGH-CA |  | 24 – 48     | <ul style="list-style-type: none"><li>○ Machining centres</li><li>○ NC lathes</li><li>○ Grinding machines</li><li>○ Precision milling machines</li><li>○ High performance cutting machines</li><li>○ Automation technology</li><li>○ Transport technology</li><li>○ Measuring technology</li><li>○ Machines and devices with high required positioning accuracy</li></ul> |
| Flange type            | EGW-SC<br>EGW-CC |  |             |                                                                                                                                                                                                                                                                                                                                                                           |

## 3.3.5 Profile rail types


In addition to profile rails with standard fastening from above, HIWIN also offers rails for fastening from below.

| Table 3.41 Profile rail types                                                       |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Fastening from above                                                                | Fastening from below                                                                 |
|  |  |
| EGR_R                                                                               | EGR_T                                                                                |

## 3.3.6 Preload

### Definition

Each linear guideway can be preloaded via the ball size. The curve shows that the rigidity doubles at high preload. The EG/QE series of linear guideways offers three standard preloads for different applications and conditions.

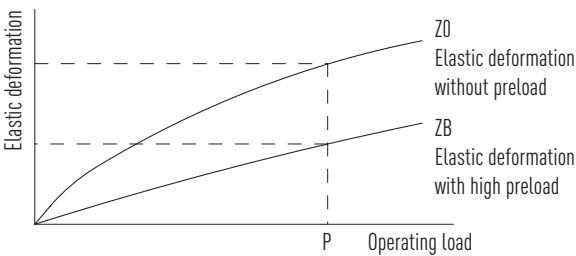

### Preload identifier

Table 3.42 Preload identifier

| Identifier | Preload        |                       | Application                                                       | Example applications                                                                                                                                                                                                                            |
|------------|----------------|-----------------------|-------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Z0</b>  | Slight preload | $0 - 0.02 C_{dyn}$    | Constant load direction, little vibration, less accuracy required | <ul style="list-style-type: none"> <li>Transport technology</li> <li>Automatic packaging machines</li> <li>X-Y axis in industrial machines</li> <li>Welding machines</li> </ul>                                                                 |
| <b>ZA</b>  | Medium preload | $0.03 - 0.05 C_{dyn}$ | High accuracy required                                            | <ul style="list-style-type: none"> <li>Machining centres</li> <li>Z axes in industrial machines</li> <li>Eroding machines</li> <li>NC lathes</li> <li>Precision X-Y table</li> <li>Measuring technology</li> </ul>                              |
| <b>ZB</b>  | High preload   | $0.06 - 0.08 C_{dyn}$ | High rigidity required, vibration and jolting                     | <ul style="list-style-type: none"> <li>Machining centres</li> <li>Grinding machines</li> <li>NC lathes</li> <li>Horizontal and vertical milling machines</li> <li>Z-axis of machine tools</li> <li>High performance cutting machines</li> </ul> |

### 3.3.7 Load ratings and torques

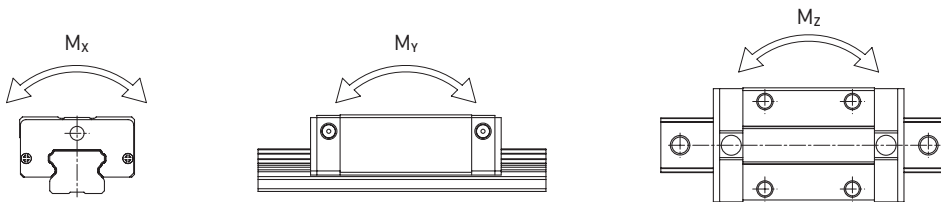


Table 3.43 Load ratings and torques for EG/QE series

| Series/Size   | Dynamic load rating $C_{dyn}$ [N] <sup>1)</sup> | Static load rating $C_0$ [N] | Static moment [Nm] |          |          |
|---------------|-------------------------------------------------|------------------------------|--------------------|----------|----------|
|               |                                                 |                              | $M_{0x}$           | $M_{0y}$ | $M_{0z}$ |
| <b>EG_15S</b> | 5,350                                           | 9,400                        | 80                 | 40       | 40       |
| <b>QE_15S</b> | 8,560                                           | 8,790                        | 70                 | 30       | 30       |
| <b>EG_15C</b> | 7,830                                           | 16,190                       | 130                | 100      | 100      |
| <b>QE_15C</b> | 12,530                                          | 15,280                       | 120                | 90       | 90       |
| <b>EG_20S</b> | 7,230                                           | 12,740                       | 130                | 60       | 60       |
| <b>QE_20S</b> | 11,570                                          | 12,180                       | 130                | 50       | 50       |
| <b>EG_20C</b> | 10,310                                          | 21,130                       | 220                | 160      | 160      |
| <b>QE_20C</b> | 16,500                                          | 20,210                       | 210                | 150      | 150      |
| <b>EG_25S</b> | 11,400                                          | 19,500                       | 230                | 120      | 120      |
| <b>QE_25S</b> | 18,240                                          | 18,900                       | 220                | 100      | 100      |
| <b>EG_25C</b> | 16,270                                          | 32,400                       | 380                | 320      | 320      |
| <b>QE_25C</b> | 26,030                                          | 31,490                       | 370                | 290      | 290      |
| <b>EG_30S</b> | 16,420                                          | 28,100                       | 400                | 210      | 210      |
| <b>QE_30S</b> | 26,270                                          | 27,820                       | 400                | 180      | 180      |
| <b>EG_30C</b> | 23,700                                          | 47,460                       | 680                | 550      | 550      |
| <b>QE_30C</b> | 37,920                                          | 46,630                       | 670                | 510      | 510      |
| <b>EG_35S</b> | 22,660                                          | 37,380                       | 560                | 310      | 310      |
| <b>QE_35S</b> | 36,390                                          | 36,430                       | 610                | 330      | 330      |
| <b>EG_35C</b> | 33,350                                          | 64,840                       | 980                | 690      | 690      |
| <b>QE_35C</b> | 51,180                                          | 59,280                       | 1,000              | 750      | 750      |

<sup>1)</sup> Dynamic load rating for 50,000 m travel path

# Linear guideways

## EG/QE series

### 3.3.8 Rigidity

The rigidity depends on the preload. With the formula F 3.9, the deformation can be calculated depending on the rigidity.

F 3.9

$$\delta = \frac{P}{k}$$

- δ Deformation [µm]
- P Operating load [N]
- k Rigidity value [N/µm]

| Table 3.44 Radial rigidity of EG/QE series |             |                                   |     |     |
|--------------------------------------------|-------------|-----------------------------------|-----|-----|
| Load type                                  | Series/size | Rigidity depending on the preload |     |     |
|                                            |             | Z0                                | ZA  | ZB  |
| Average load                               | EG_15S      | 105                               | 126 | 141 |
|                                            | QE_15S      | 96                                | 115 | 128 |
|                                            | EG_20S      | 126                               | 151 | 168 |
|                                            | QE_20S      | 116                               | 139 | 153 |
|                                            | EG_25S      | 156                               | 187 | 209 |
|                                            | QE_25S      | 137                               | 165 | 184 |
|                                            | EG_30S      | 184                               | 221 | 246 |
|                                            | QE_30S      | 169                               | 203 | 226 |
|                                            | EG_35S      | 221                               | 265 | 295 |
|                                            | QE_35S      | 214                               | 257 | 287 |
| Heavy load                                 | EG_15C      | 172                               | 206 | 230 |
|                                            | QE_15C      | 157                               | 187 | 209 |
|                                            | EG_20C      | 199                               | 238 | 266 |
|                                            | QE_20C      | 183                               | 219 | 245 |
|                                            | EG_25C      | 246                               | 296 | 329 |
|                                            | QE_25C      | 219                               | 263 | 293 |
|                                            | EG_30C      | 295                               | 354 | 395 |
|                                            | QE_30C      | 271                               | 326 | 363 |
|                                            | EG_35C      | 354                               | 425 | 474 |
|                                            | QE_35C      | 333                               | 399 | 445 |

Unit: N/µm

### 3.3.9 Dimensions of the EG/QE blocks

#### 3.3.9.1 EGH/QEH

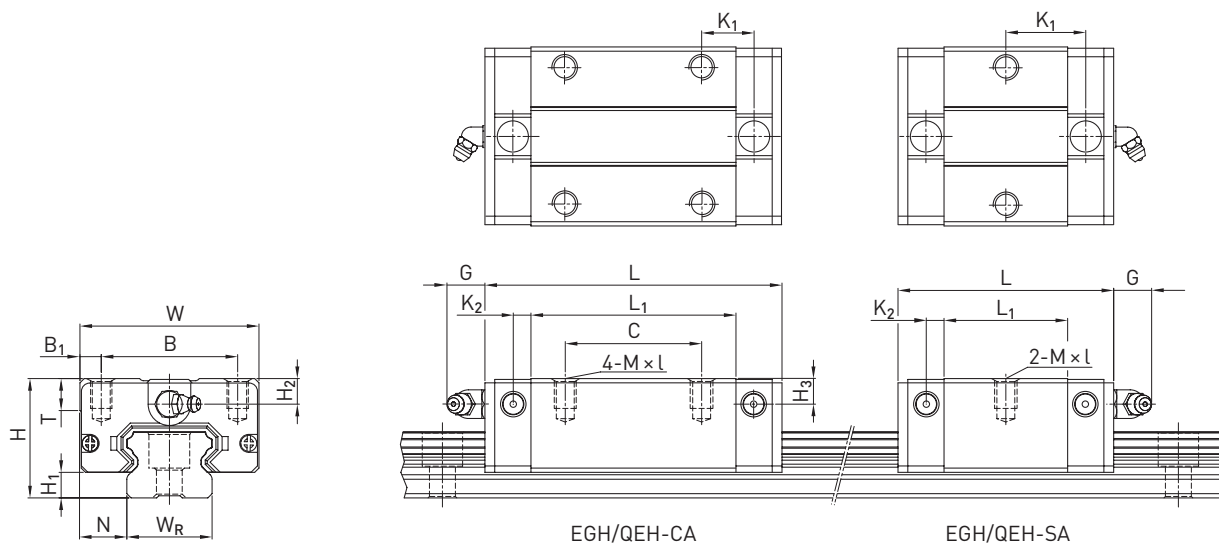


Table 3.45 Dimensions of the block

| Series/size | Installation dimensions [mm] |                |      | Dimensions of the block [mm] |    |                |    |                |       |                |                |      |         |      |                |                | Load ratings [N] |                | Weight [kg] |
|-------------|------------------------------|----------------|------|------------------------------|----|----------------|----|----------------|-------|----------------|----------------|------|---------|------|----------------|----------------|------------------|----------------|-------------|
|             | H                            | H <sub>1</sub> | N    | W                            | B  | B <sub>1</sub> | C  | L <sub>1</sub> | L     | K <sub>1</sub> | K <sub>2</sub> | G    | M × l   | T    | H <sub>2</sub> | H <sub>3</sub> | C <sub>dyn</sub> | C <sub>0</sub> |             |
| EGH15SA     | 24                           | 4.5            | 9.5  | 34                           | 26 | 4.0            | —  | 23.1           | 40.1  | 14.80          | 3.50           | 5.7  | M4 × 6  | 6.0  | 5.5            | 6.0            | 5,350            | 9,400          | 0.09        |
| EGH15CA     |                              |                |      |                              |    |                | 26 | 39.8           | 56.8  | 10.15          |                |      |         |      |                |                | 7,830            | 16,190         | 0.15        |
| QEH15SA     | 24                           | 4.0            | 9.5  | 34                           | 26 | 4.0            | —  | 23.1           | 40.1  | 14.80          | 3.50           | 5.7  | M4 × 6  | 6.0  | 5.5            | 6.0            | 8,560            | 8,790          | 0.09        |
| QEH15CA     |                              |                |      |                              |    |                | 26 | 39.8           | 56.8  | 10.15          |                |      |         |      |                |                | 12,530           | 15,280         | 0.15        |
| EGH20SA     | 28                           | 6.0            | 11.0 | 42                           | 32 | 5.0            | —  | 29.0           | 50.0  | 18.75          | 4.15           | 12.0 | M5 × 7  | 7.5  | 6.0            | 6.0            | 7,230            | 12,740         | 0.15        |
| EGH20CA     |                              |                |      |                              |    |                | 32 | 48.1           | 69.1  | 12.30          |                |      |         |      |                |                | 10,310           | 21,130         | 0.24        |
| QEH20SA     | 28                           | 6.0            | 11.0 | 42                           | 32 | 5.0            | —  | 29.0           | 50.0  | 18.75          | 4.15           | 12.0 | M5 × 7  | 7.5  | 6.0            | 6.5            | 11,570           | 12,180         | 0.15        |
| QEH20CA     |                              |                |      |                              |    |                | 32 | 48.1           | 69.1  | 12.30          |                |      |         |      |                |                | 16,500           | 20,210         | 0.23        |
| EGH25SA     | 33                           | 7.0            | 12.5 | 48                           | 35 | 6.5            | —  | 35.5           | 59.1  | 21.90          | 4.55           | 12.0 | M6 × 9  | 8.0  | 8.0            | 8.0            | 11,400           | 19,500         | 0.25        |
| EGH25CA     |                              |                |      |                              |    |                | 35 | 59.0           | 82.6  | 16.15          |                |      |         |      |                |                | 16,270           | 32,400         | 0.41        |
| QEH25SA     | 33                           | 6.2            | 12.5 | 48                           | 35 | 6.5            | —  | 35.5           | 60.1  | 21.90          | 5.00           | 12.0 | M6 × 9  | 8.0  | 8.0            | 8.0            | 18,240           | 18,900         | 0.24        |
| QEH25CA     |                              |                |      |                              |    |                | 35 | 59.0           | 83.6  | 16.15          |                |      |         |      |                |                | 26,030           | 31,490         | 0.40        |
| EGH30SA     | 42                           | 10.0           | 16.0 | 60                           | 40 | 10.0           | —  | 41.5           | 69.5  | 26.75          | 6.00           | 12.0 | M8 × 12 | 9.0  | 8.0            | 9.0            | 16,420           | 28,100         | 0.45        |
| EGH30CA     |                              |                |      |                              |    |                | 40 | 70.1           | 98.1  | 21.05          |                |      |         |      |                |                | 23,700           | 47,460         | 0.76        |
| QEH30SA     | 42                           | 10.0           | 16.0 | 60                           | 40 | 10.0           | —  | 41.5           | 67.5  | 25.75          | 6.00           | 12.0 | M8 × 12 | 9.0  | 8.0            | 9.0            | 26,270           | 27,820         | 0.44        |
| QEH30CA     |                              |                |      |                              |    |                | 40 | 70.1           | 96.1  | 20.05          |                |      |         |      |                |                | 37,920           | 46,630         | 0.75        |
| EGH35SA     | 48                           | 11.0           | 18.0 | 70                           | 50 | 10.0           | —  | 45.0           | 75.0  | 28.50          | 7.00           | 12.0 | M8 × 12 | 10.0 | 8.5            | 8.5            | 22,660           | 37,380         | 0.74        |
| EGH35CA     |                              |                |      |                              |    |                | 50 | 78.0           | 108.0 | 20.00          |                |      |         |      |                |                | 33,350           | 64,840         | 1.10        |
| QEH35SA     | 48                           | 11.0           | 18.0 | 70                           | 50 | 10.0           | —  | 51.0           | 76.0  | 30.30          | 6.25           | 12.0 | M8 × 12 | 10.0 | 8.5            | 8.5            | 36,390           | 36,430         | 0.58        |
| QEH35CA     |                              |                |      |                              |    |                | 50 | 83.0           | 108.0 | 21.30          |                |      |         |      |                |                | 51,180           | 59,280         | 0.90        |

For dimensions of the rail, see Page 75, for standard as well as optional lubrication adapter, see Page 150.

# Linear guideways

## EG/QE series

### 3.3.9.2 EGW/QEW

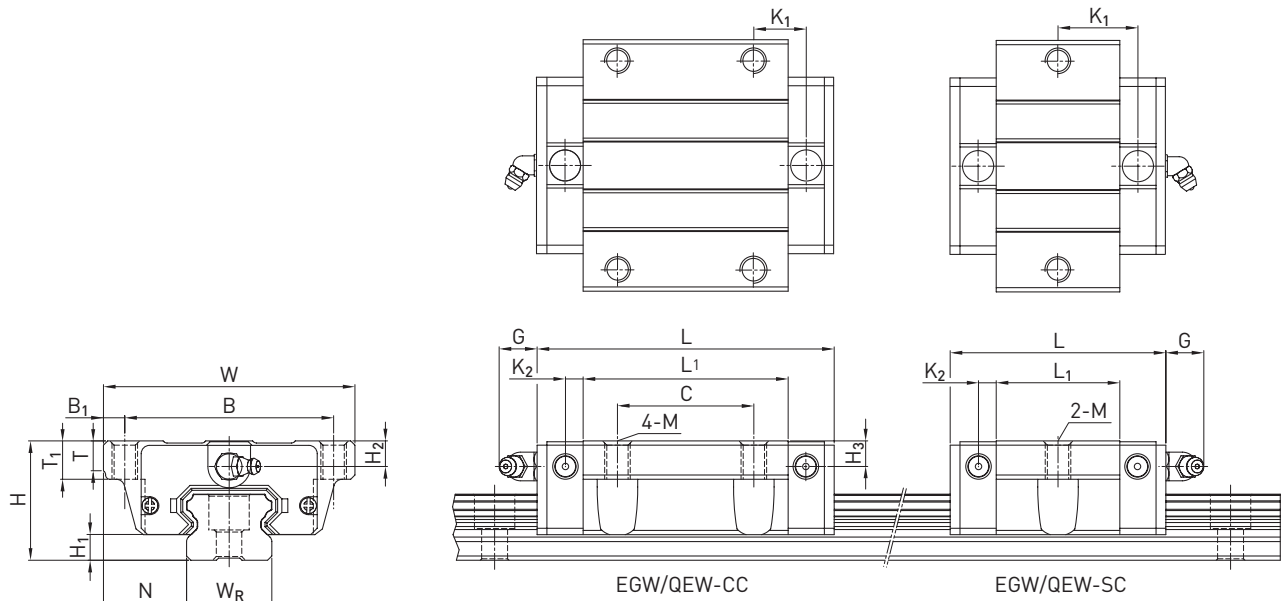


Table 3.46 Dimensions of the block

| Series/size | Installation dimensions [mm] |                |      | Dimensions of the block [mm] |    |                |    |                |       |                |                |      |     |      |                |                |                |                  | Load ratings [N] |      | Weight [kg] |
|-------------|------------------------------|----------------|------|------------------------------|----|----------------|----|----------------|-------|----------------|----------------|------|-----|------|----------------|----------------|----------------|------------------|------------------|------|-------------|
|             | H                            | H <sub>1</sub> | N    | W                            | B  | B <sub>1</sub> | C  | L <sub>1</sub> | L     | K <sub>1</sub> | K <sub>2</sub> | G    | M   | T    | T <sub>1</sub> | H <sub>2</sub> | H <sub>3</sub> | C <sub>dyn</sub> | C <sub>0</sub>   |      |             |
| EGW15SC     | 24                           | 4.5            | 18.5 | 52                           | 41 | 5.5            | —  | 23.1           | 40.1  | 14.80          | 3.50           | 5.7  | M5  | 5.0  | 7              | 5.5            | 6.0            | 5,350            | 9,400            | 0.12 |             |
| EGW15CC     |                              |                |      |                              |    |                | 26 | 39.8           | 56.8  | 10.15          |                |      |     |      |                |                |                | 7,830            | 16,190           | 0.21 |             |
| QEW15SC     | 24                           | 4.0            | 18.5 | 52                           | 41 | 5.5            | —  | 23.1           | 40.1  | 14.80          | 3.50           | 5.7  | M5  | 5.0  | —              | 5.5            | 6.0            | 8,560            | 8,790            | 0.12 |             |
| QEW15CC     |                              |                |      |                              |    |                | 26 | 39.8           | 56.8  | 10.15          |                |      |     |      |                |                |                | 12,530           | 15,280           | 0.21 |             |
| EGW20SC     | 28                           | 6.0            | 19.5 | 59                           | 49 | 5.0            | —  | 29.0           | 50.0  | 18.75          | 4.15           | 12.0 | M6  | 7.0  | 9              | 6.0            | 6.0            | 7,230            | 12,740           | 0.19 |             |
| EGW20CC     |                              |                |      |                              |    |                | 32 | 48.1           | 69.1  | 12.30          |                |      |     |      |                |                |                | 10,310           | 21,130           | 0.32 |             |
| QEW20SC     | 28                           | 6.0            | 19.5 | 59                           | 49 | 5.0            | —  | 29.0           | 50.0  | 18.75          | 4.15           | 12.0 | M6  | 7.0  | —              | 6.0            | 6.5            | 11,570           | 12,180           | 0.19 |             |
| QEW20CC     |                              |                |      |                              |    |                | 32 | 48.1           | 69.1  | 12.30          |                |      |     |      |                |                |                | 16,500           | 20,210           | 0.31 |             |
| EGW25SC     | 33                           | 7.0            | 25.0 | 73                           | 60 | 6.5            | —  | 35.5           | 59.1  | 21.90          | 4.55           | 12.0 | M8  | 7.5  | 10             | 8.0            | 8.0            | 11,400           | 19,500           | 0.35 |             |
| EGW25CC     |                              |                |      |                              |    |                | 35 | 59.0           | 82.6  | 16.15          |                |      |     |      |                |                |                | 16,270           | 32,400           | 0.59 |             |
| QEW25SC     | 33                           | 6.2            | 25.0 | 73                           | 60 | 6.5            | —  | 35.5           | 60.1  | 21.90          | 5.00           | 12.0 | M8  | 7.5  | —              | 8.0            | 8.0            | 18,240           | 18,900           | 0.34 |             |
| QEW25CC     |                              |                |      |                              |    |                | 35 | 59.0           | 83.6  | 16.15          |                |      |     |      |                |                |                | 26,030           | 31,490           | 0.58 |             |
| EGW30SC     | 42                           | 10.0           | 31.0 | 90                           | 72 | 9.0            | —  | 41.5           | 69.5  | 26.75          | 6.00           | 12.0 | M10 | 7.0  | 10             | 8.0            | 9.0            | 16,420           | 28,100           | 0.62 |             |
| EGW30CC     |                              |                |      |                              |    |                | 40 | 70.1           | 98.1  | 21.05          |                |      |     |      |                |                |                | 23,700           | 47,460           | 1.04 |             |
| QEW30SC     | 42                           | 10.0           | 31.0 | 90                           | 72 | 9.0            | —  | 41.5           | 67.5  | 25.75          | 6.00           | 12.0 | M10 | 7.0  | —              | 8.0            | 9.0            | 26,270           | 27,820           | 0.61 |             |
| QEW30CC     |                              |                |      |                              |    |                | 40 | 70.1           | 96.1  | 20.05          |                |      |     |      |                |                |                | 37,920           | 46,630           | 1.03 |             |
| EGW35SC     | 48                           | 11.0           | 33.0 | 100                          | 82 | 9.0            | —  | 45.0           | 75.0  | 28.50          | 7.00           | 12.0 | M10 | 10.0 | 13             | 8.5            | 8.5            | 22,660           | 37,380           | 0.91 |             |
| EGW35CC     |                              |                |      |                              |    |                | 50 | 78.0           | 108.0 | 20.00          |                |      |     |      |                |                |                | 33,350           | 64,840           | 1.40 |             |
| QEW35SC     | 48                           | 11.0           | 33.0 | 100                          | 82 | 9.0            | —  | 51.0           | 76.0  | 30.30          | 6.25           | 12.0 | M10 | 10.0 | 13             | 8.5            | 8.5            | 36,390           | 36,430           | 0.77 |             |
| QEW35CC     |                              |                |      |                              |    |                | 50 | 83.0           | 108.0 | 21.30          |                |      |     |      |                |                |                | 51,180           | 59,280           | 1.19 |             |

For dimensions of the rail, see Page 75, for standard as well as optional lubrication adapter, see Page 150.

### 3.3.10 Dimensions of the EG rail

The EG profile rail is used for both the EG and QE blocks.

#### 3.3.10.1 Dimensions EGR\_R

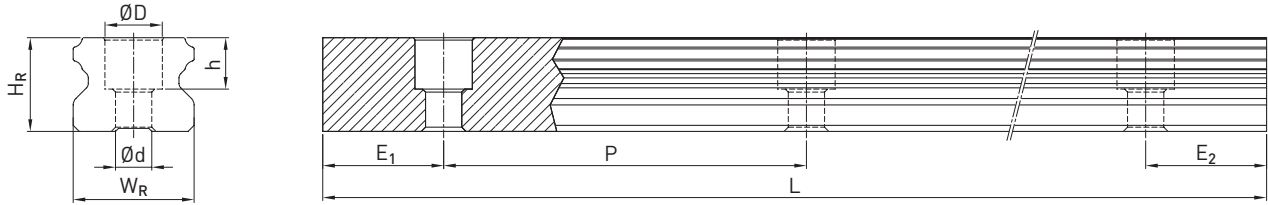


Table 3.47 Dimensions of profile rail EGR\_R

| Series/size | Assembly screw for rail [mm] | Dimensions of the rail [mm] |       |      |      |     |    | Max. length [mm] | Max. length $E_1 = E_2$ [mm] | Min. length [mm] | $E_{1/2}$ min [mm] | $E_{1/2}$ max [mm] | Weight [kg/m] |
|-------------|------------------------------|-----------------------------|-------|------|------|-----|----|------------------|------------------------------|------------------|--------------------|--------------------|---------------|
|             |                              | $W_R$                       | $H_R$ | D    | h    | d   | P  |                  |                              |                  |                    |                    |               |
| EGR15R      | M3 × 16                      | 15                          | 12.5  | 6.0  | 4.5  | 3.5 | 60 | 4,000            | 3,900                        | 70               | 5                  | 54                 | 1.25          |
| EGR20R      | M5 × 20                      | 20                          | 15.5  | 9.5  | 8.5  | 6.0 | 60 | 4,000            | 3,900                        | 74               | 7                  | 53                 | 2.08          |
| EGR25R      | M6 × 25                      | 23                          | 18.0  | 11.0 | 9.0  | 7.0 | 60 | 4,000/5,600      | 3,900/5,520 <sup>1)</sup>    | 76               | 8                  | 52                 | 2.67          |
| EGR30R      | M6 × 30                      | 28                          | 23.0  | 11.0 | 9.0  | 7.0 | 80 | 4,000/5,600      | 3,900/5,520 <sup>1)</sup>    | 96               | 8                  | 71                 | 4.35          |
| EGR35R      | M8 × 35                      | 34                          | 27.5  | 14.0 | 12.0 | 9.0 | 80 | 4,000            | 3,920                        | 98               | 9                  | 71                 | 6.14          |

#### 3.3.10.2 Dimensions EGR\_U (large mounting holes)

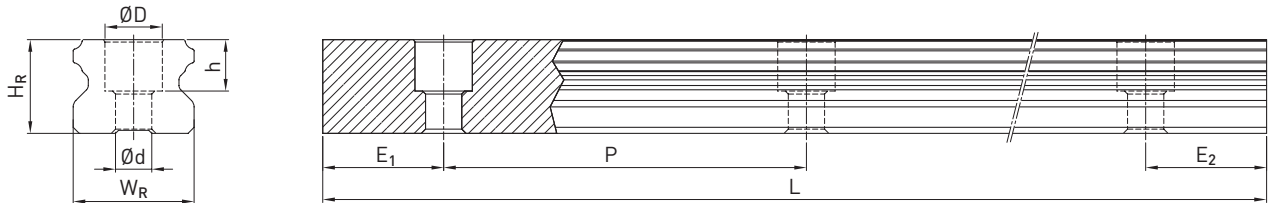


Table 3.48 Dimensions of profile rail EGR\_U

| Series/size | Assembly screw for rail [mm] | Dimensions of the rail [mm] |       |      |      |     |    | Max. length [mm] | Max. length $E_1 = E_2$ [mm] | Min. length [mm] | $E_{1/2}$ min [mm] | $E_{1/2}$ max [mm] | Weight [kg/m] |
|-------------|------------------------------|-----------------------------|-------|------|------|-----|----|------------------|------------------------------|------------------|--------------------|--------------------|---------------|
|             |                              | $W_R$                       | $H_R$ | D    | h    | d   | P  |                  |                              |                  |                    |                    |               |
| EGR15U      | M4 × 16                      | 15                          | 12.5  | 7.5  | 5.3  | 4.5 | 60 | 4,000            | 3,900                        | 72               | 6                  | 54                 | 1.23          |
| EGR30U      | M8 × 30                      | 28                          | 23.0  | 14.0 | 12.0 | 9.0 | 80 | 4,000            | 3,920                        | 98               | 9                  | 71                 | 4.23          |

Note:

1. The tolerance for E is +0.5 to -1 mm for standard, for joint connections 0 to -0.3 mm.
2. If no information is provided on the  $E_{1/2}$  dimensions, the maximum number of mounting holes is determined taking into account  $E_{1/2}$  min.
3. The rails are shortened to the desired length. If no information on the  $E_{1/2}$  dimensions is provided, then the rails are manufactured symmetrically.

# Linear guideways

## EG/QE series

### 3.3.10.3 Dimensions EGR\_T (profile rail fastening from below)

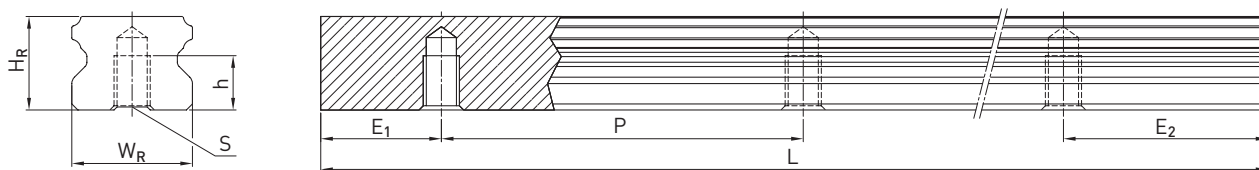


Table 3.49 Dimensions of profile rail EGR\_T


| Series/size | Dimensions of the rail [mm] |       |    |    |    | Max. length<br>[mm] | Max. length<br>$E_1 = E_2$ [mm] | Min. length<br>[mm] | $E_{1/2}$ min<br>[mm] | $E_{1/2}$ max<br>[mm] | Weight<br>[kg/m] |
|-------------|-----------------------------|-------|----|----|----|---------------------|---------------------------------|---------------------|-----------------------|-----------------------|------------------|
|             | $W_R$                       | $H_R$ | S  | h  | P  |                     |                                 |                     |                       |                       |                  |
| EGR15T      | 15                          | 12.5  | M5 | 7  | 60 | 4,000               | 3,900                           | 70                  | 5                     | 54                    | 1.26             |
| EGR20T      | 20                          | 15.5  | M6 | 9  | 60 | 4,000               | 3,900                           | 74                  | 7                     | 53                    | 2.15             |
| EGR25T      | 23                          | 18.0  | M6 | 10 | 60 | 4,000               | 3,900                           | 76                  | 8                     | 52                    | 2.79             |
| EGR30T      | 28                          | 23.0  | M8 | 14 | 80 | 4,000               | 3,920                           | 96                  | 8                     | 71                    | 4.42             |
| EGR35T      | 34                          | 27.5  | M8 | 17 | 80 | 4,000               | 3,920                           | 98                  | 9                     | 71                    | 6.34             |

Note:

1. The tolerance for E is +0,5 to -1 mm for standard, for joint connections 0 to -0.3 mm.
2. If no information is provided on the  $E_{1/2}$  dimensions, the maximum number of mounting holes is determined taking into account  $E_{1/2}$  min.
3. The rails are shortened to the desired length. If no information on the  $E_{1/2}$  dimensions is provided, then the rails are manufactured symmetrically.

### 3.3.10.4 Calculation of the length of profile rails

HIWIN offers profile rails in customised lengths. To make sure the end of the profile rail does not become unstable, the value E should not exceed half the distance between the mounting holes (P). At the same time, the value  $E_{1/2}$  should be between  $E_{1/2}$  min and  $E_{1/2}$  max so that the mounting hole does not break out.

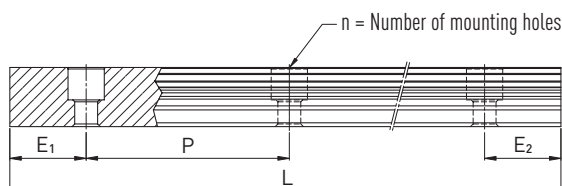

$$F 3.10 \quad L = (n - 1) \times P + E_1 + E_2$$

- L Total length of the profile rail [mm]  
n Number of mounting holes  
P Distance between two mounting holes [mm]  
 $E_{1/2}$  Distance from the centre of the last mounting hole to the end of the profile rail [mm].

### 3.3.10.5 Cover caps for mounting holes of profile rails

The cover caps are used to keep the mounting holes free of chips and dirt. The standard plastic cover caps accompany each profile rail. Optional cover caps have to be ordered separately.



Table 3.50 Cover caps for mounting holes of profile rails

| Rail   | Screw | Article number      |                     |                     | Ø D [mm] | Height H [mm] |
|--------|-------|---------------------|---------------------|---------------------|----------|---------------|
|        |       | Plastic (200 units) | Brass <sup>1)</sup> | Steel <sup>1)</sup> |          |               |
| EGR15R | M3    | 5-002217            | 5-001340            | —                   | 6.0      | 1.2           |
| EGR20R | M5    | 5-002220            | 5-001350            | 5-001352            | 9.5      | 2.5           |
| EGR25R | M6    | 5-002221            | 5-001355            | 5-001357            | 11.0     | 2.8           |
| EGR30R | M6    | 5-002221            | 5-001355            | 5-001357            | 11.0     | 2.8           |
| EGR35R | M8    | 5-002222            | 5-001360            | 5-001362            | 14.0     | 3.5           |
| EGR15U | M4    | 5-002218            | 5-001344            | —                   | 7.5      | 1.2           |
| EGR30U | M8    | 5-002222            | 5-001360            | 5-001362            | 14.0     | 3.5           |

<sup>1)</sup> Not recommended for coated rails.

### 3.3.11 Sealing systems

Different sealing systems are available for HIWIN blocks. You can find an overview on Page 22. The following table shows the total length of the blocks with different sealing systems. Appropriate sealing systems are available for these sizes.

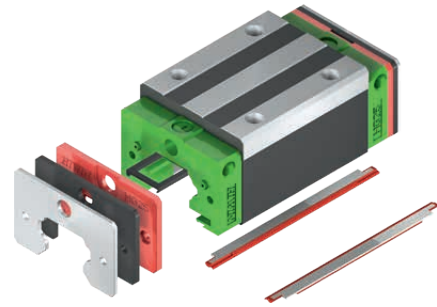



Table 3.51 Total length of block with different sealing systems

| Series/size | Total length L (including screws) |       |       |       |
|-------------|-----------------------------------|-------|-------|-------|
|             | SS                                | DD    | ZZ    | KK    |
| EG_15S      | 40.1                              | 44.1  | 41.7  | 45.7  |
| QE_15S      | 40.1                              | 44.1  | 42.1  | 46.1  |
| EG_15C      | 56.8                              | 60.8  | 58.4  | 62.4  |
| QE_15C      | 56.8                              | 60.8  | 58.8  | 62.8  |
| EG_20S      | 50.0                              | 54.0  | 51.6  | 55.6  |
| QE_20S      | 50.0                              | 54.0  | 52.0  | 56.0  |
| EG_20C      | 69.1                              | 73.1  | 70.7  | 74.7  |
| QE_20C      | 69.1                              | 73.1  | 71.1  | 75.1  |
| EG_25S      | 59.1                              | 63.1  | 61.1  | 65.1  |
| QE_25S      | 60.1                              | 65.1  | 62.1  | 67.1  |
| EG_25C      | 82.6                              | 86.6  | 84.6  | 88.6  |
| QE_25C      | 83.6                              | 88.6  | 85.6  | 90.6  |
| EG_30S      | 69.5                              | 73.5  | 71.5  | 75.5  |
| QE_30S      | 67.5                              | 72.5  | 69.5  | 74.5  |
| EG_30C      | 98.1                              | 102.1 | 100.1 | 104.1 |
| QE_30C      | 96.1                              | 101.1 | 98.1  | 103.1 |
| EG_35S      | 75.0                              | 79.0  | 78.0  | 82.0  |
| QE_35S      | 76.0                              | 80.0  | 79.0  | 83.0  |
| EG_35C      | 108.0                             | 112.0 | 111.0 | 115.0 |
| QE_35C      | 108.0                             | 112.0 | 111.0 | 115.0 |

Unit: mm

#### 3.3.11.1 Designation of the seal sets

The seal sets are always shipped complete with the installation materials and include the supplemental parts for the standard seal.

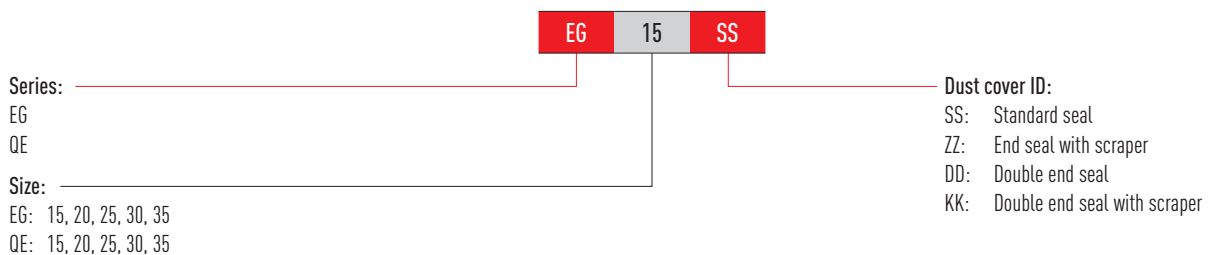

# Linear guideways

## EG/QE series

### 3.3.12 Long-term lubrication unit

Further information on the lubrication unit can be found in the general information

In section "2.6.3 Long-term lubrication unit" on Page 15.

The following drawing shows the dimension (L) for a single-sided lubrication unit.

(standard) The dimension for a double-sided lubrication unit results from the dimension  $L + V + T$ . The E2 long-term lubrication unit is available with the sealing systems named in the table.

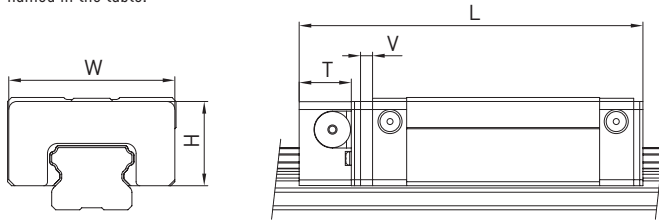


Table 3.52 Dimensions of the block with lubrication unit E2


| Model  | Dimensions of the block [mm] |      |      |     |                               |                               |                               |                               | Max. running performance <sup>2)</sup><br>[km] E2 single-sided | Max. running performance <sup>2)</sup><br>[km] E2 double-sided |
|--------|------------------------------|------|------|-----|-------------------------------|-------------------------------|-------------------------------|-------------------------------|----------------------------------------------------------------|----------------------------------------------------------------|
|        | W                            | H    | T    | V   | L <sub>SS</sub> <sup>1)</sup> | L <sub>ZZ</sub> <sup>1)</sup> | L <sub>DD</sub> <sup>1)</sup> | L <sub>KK</sub> <sup>1)</sup> |                                                                |                                                                |
| EG_15S | 33.3                         | 18.7 | 11.5 | 3.0 | 54.6                          | 56.2                          | 58.6                          | 60.2                          | 10,000                                                         | 20,000                                                         |
| QE_15S | 33.3                         | 19.2 | 11.5 | 3   | 54.6                          | –                             | –                             | –                             | 20,000                                                         | 30,000                                                         |
| EG_15C | 33.3                         | 18.7 | 11.5 | 3.0 | 71.3                          | 72.9                          | 75.3                          | 76.9                          | 10,000                                                         | 20,000                                                         |
| QE_15C | 33.3                         | 19.2 | 11.5 | 3   | 71.3                          | –                             | –                             | –                             | 20,000                                                         | 30,000                                                         |
| EG_20S | 41.3                         | 20.9 | 13.0 | 3.0 | 66.0                          | 67.6                          | 70.0                          | 71.6                          | 10,000                                                         | 20,000                                                         |
| QE_20S | 41.3                         | 20.9 | 13   | 3   | 66.0                          | –                             | –                             | –                             | 20,000                                                         | 30,000                                                         |
| EG_20C | 41.3                         | 20.9 | 13.0 | 3.0 | 85.1                          | 86.7                          | 89.1                          | 90.7                          | 10,000                                                         | 20,000                                                         |
| QE_20C | 41.3                         | 20.9 | 13   | 3   | 85.1                          | –                             | –                             | –                             | 20,000                                                         | 30,000                                                         |
| EG_25S | 47.3                         | 24.9 | 13.0 | 3.0 | 75.1                          | 77.1                          | 79.1                          | 81.1                          | 10,000                                                         | 20,000                                                         |
| QE_25S | 47.3                         | 24.9 | 13   | 3   | 76.1                          | –                             | –                             | –                             | 20,000                                                         | 30,000                                                         |
| EG_25C | 47.3                         | 24.9 | 13.0 | 3.0 | 98.6                          | 100.6                         | 102.6                         | 104.6                         | 10,000                                                         | 20,000                                                         |
| QE_25C | 47.3                         | 24.9 | 13   | 3   | 99.6                          | –                             | –                             | –                             | 20,000                                                         | 30,000                                                         |
| EG_30S | 59.3                         | 31.0 | 13.0 | 3.0 | 85.5                          | 87.5                          | 89.5                          | 91.5                          | 10,000                                                         | 20,000                                                         |
| QE_30S | 59.3                         | 31   | 13   | 3   | 83.5                          | –                             | –                             | –                             | 20,000                                                         | 30,000                                                         |
| EG_30C | 59.3                         | 31.0 | 13.0 | 3.0 | 114.1                         | 116.1                         | 118.1                         | 120.1                         | 10,000                                                         | 20,000                                                         |
| QE_30C | 59.3                         | 31   | 13   | 3   | 112.1                         | –                             | –                             | –                             | 20,000                                                         | 30,000                                                         |
| QE_35S | 68                           | 35.5 | 13   | 3   | 92.0                          | –                             | –                             | –                             | 20,000                                                         | 30,000                                                         |
| QE_35C | 68                           | 35.5 | 13   | 3   | 124.0                         | –                             | –                             | –                             | 20,000                                                         | 30,000                                                         |

<sup>1)</sup> Total length depending on the selected dust protection. SS = Standard dust protection

<sup>2)</sup> Further details can be found in the assembly instructions in the "Lubrication" chapter

### 3.3.13 Tolerances depending on the accuracy class

The EG and QE series are available in five accuracy classes according to the parallelism between block and rail, height accuracy H and width accuracy N. The selection of the accuracy class is determined by the requirements of the machine.

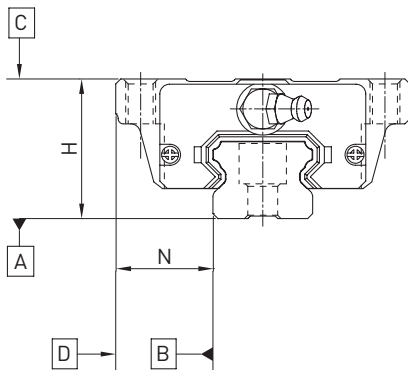

#### 3.3.13.1 Parallelism

Parallelism of locating surfaces D and B of the block and rail and of top block surface C to mounting surface A of the rail. Ideal installation of the linear guideway and the measurement in the centre of the block are prerequisites.

Table 3.53 Tolerance of parallelism between block and profile rail

| Rail length [mm] | Accuracy class |    |    |    |    |
|------------------|----------------|----|----|----|----|
|                  | C              | H  | P  | SP | UP |
| – 100            | 12             | 7  | 3  | 2  | 2  |
| 100 – 200        | 14             | 9  | 4  | 2  | 2  |
| 200 – 300        | 15             | 10 | 5  | 3  | 2  |
| 300 – 500        | 17             | 12 | 6  | 3  | 2  |
| 500 – 700        | 20             | 13 | 7  | 4  | 2  |
| 700 – 900        | 22             | 15 | 8  | 5  | 3  |
| 900 – 1100       | 24             | 16 | 9  | 6  | 3  |
| 1100 – 1500      | 26             | 18 | 11 | 7  | 4  |
| 1500 – 1900      | 28             | 20 | 13 | 8  | 4  |
| 1900 – 2500      | 31             | 22 | 15 | 10 | 5  |
| 2500 – 3100      | 33             | 25 | 18 | 11 | 6  |
| 3100 – 3600      | 36             | 27 | 20 | 14 | 7  |
| 3600 – 4000      | 37             | 28 | 21 | 15 | 7  |

Unit:  $\mu\text{m}$

# Linear guideways

## EG/QE series

### 3.3.13.2 Accuracy – height and width

#### Height tolerance of H

Permissible absolute dimension deviation of height H, measured between the centre of bolting surface C and rail underside A, with any position of the block on the rail.

#### Height variance of H

Permissible deviation of height H between several blocks on one rail, measured at the same position of the rail.

#### Width tolerance of N

Permissible absolute dimension deviation of width N, measured between the centre of bolting surfaces D and B, with any position of the block on the rail.

#### Width variance of N

Permissible deviation of width N between several blocks on one rail, measured at the same position of the rail.

Table 3.54 Tolerances of width and height

| Series/size                    | Accuracy class       | Height tolerance of H              | Width tolerance of N               | Height variance of H | Width variance of N |
|--------------------------------|----------------------|------------------------------------|------------------------------------|----------------------|---------------------|
| EG_15, 20<br>QE_15, 20         | C (Normal)           | $\pm 0.1$                          | $\pm 0.1$                          | 0.02                 | 0.02                |
|                                | H (high)             | $\pm 0.03$                         | $\pm 0.03$                         | 0.01                 | 0.01                |
|                                | P (precision)        | $0/-0.03^{1)}$<br>$\pm 0.015^{2)}$ | $0/-0.03^{1)}$<br>$\pm 0.015^{2)}$ | 0.006                | 0.006               |
|                                | SP (super precision) | $0/-0.015$                         | $0/-0.015$                         | 0.004                | 0.004               |
|                                | UP (ultra precision) | $0/-0.008$                         | $0/-0.008$                         | 0.003                | 0.003               |
| EG_25, 30, 35<br>QE_25, 30, 35 | C (Normal)           | $\pm 0.1$                          | $\pm 0.1$                          | 0.02                 | 0.03                |
|                                | H (high)             | $\pm 0.04$                         | $\pm 0.04$                         | 0.015                | 0.015               |
|                                | P (precision)        | $0/-0.04^{1)}$<br>$\pm 0.02^{2)}$  | $0/-0.04^{1)}$<br>$\pm 0.02^{2)}$  | 0.007                | 0.007               |
|                                | SP (super precision) | $0/-0.02$                          | $0/-0.02$                          | 0.005                | 0.005               |
|                                | UP (ultra precision) | $0/-0.01$                          | $0/-0.01$                          | 0.003                | 0.003               |


Unit: mm

<sup>1)</sup> Assembled linear guideway

<sup>2)</sup> Unassembled linear guideway

### 3.3.13.3 Permissible tolerances of the mounting surface

Once the requirements for the accuracy of the mounting surfaces are met, the high accuracy, rigidity and service life of the EG and QE series linear guideways are achieved.

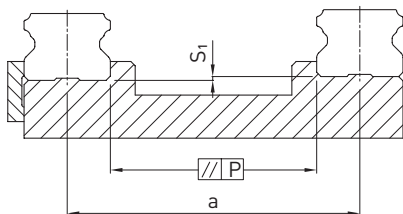

**Tolerance of parallelism of reference surface (P):**

Table 3.55 Maximum tolerance for parallelism (P)

| Series/Size | Preload class |    |    |
|-------------|---------------|----|----|
|             | Z0            | ZA | ZB |
| EG/QE_15    | 25            | 18 | —  |
| EG/QE_20    | 25            | 20 | 18 |
| EG/QE_25    | 30            | 22 | 20 |
| EG/QE_30    | 40            | 30 | 27 |
| EG/QE_35    | 50            | 35 | 30 |

Unit:  $\mu\text{m}$

**Tolerance of height of reference surface ( $S_1$ ):**

**F 3.11**  $S_1 = a \times K$

$S_1$  Maximum height tolerance [mm]

$a$  Distance between rails [mm]

$K$  Coefficient of height tolerance

Table 3.56 Coefficient of height tolerance (K)

| Series/Size | Preload class        |                      |                      |
|-------------|----------------------|----------------------|----------------------|
|             | Z0                   | ZA                   | ZB                   |
| EG/QE_15    | $2.6 \times 10^{-4}$ | $1.7 \times 10^{-4}$ | —                    |
| EG/QE_20    | $2.6 \times 10^{-4}$ | $1.7 \times 10^{-4}$ | $1.0 \times 10^{-4}$ |
| EG/QE_25    | $2.6 \times 10^{-4}$ | $1.7 \times 10^{-4}$ | $1.4 \times 10^{-4}$ |
| EG/QE_30    | $3.4 \times 10^{-4}$ | $2.2 \times 10^{-4}$ | $1.8 \times 10^{-4}$ |
| EG/QE_35    | $4.2 \times 10^{-4}$ | $3.0 \times 10^{-4}$ | $2.4 \times 10^{-4}$ |

**3.3.14 Shoulder heights and edge roundings**

Inaccurate shoulder heights and edge roundings of mounting surfaces impair accuracy and may conflict with the block or rail profile. The following shoulder heights and edge profiles must be observed to avoid assembly problems.

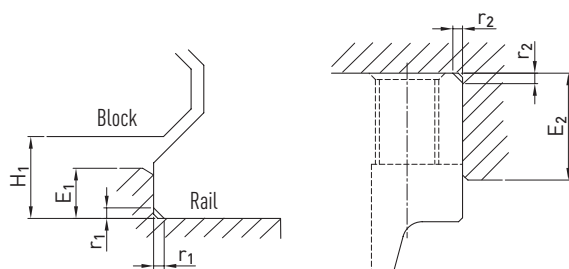


Table 3.57 Shoulder heights and edge roundings

| Series/Size | Max. radius of edges $r_1$ | Max. radius of edges $r_2$ | Shoulder height of the reference edge of rail $E_1$ | Shoulder height of the reference edge of block $E_2$ | Clearance height under block $H_1$ |
|-------------|----------------------------|----------------------------|-----------------------------------------------------|------------------------------------------------------|------------------------------------|
| EG/QE_15    | 0.5                        | 0.5                        | 2.7                                                 | 5.0                                                  | 4.5                                |
| EG/QE_20    | 0.5                        | 0.5                        | 5.0                                                 | 7.0                                                  | 6.0                                |
| EG/QE_25    | 1.0                        | 1.0                        | 5.0                                                 | 7.5                                                  | 7.0                                |
| EG/QE_30    | 1.0                        | 1.0                        | 7.0                                                 | 7.0                                                  | 10.0                               |
| EG_35       | 1.0                        | 1.0                        | 7.5                                                 | 9.5                                                  | 11.0                               |
| QE_35       | 1.0                        | 1.5                        | 7.5                                                 | 9.5                                                  | 11.0                               |

Unit: mm