ENCLOSURES, GUARDS AND PARTITIONS

FATH

ENCLOSURES, GUARDS AND PARTITIONS

ATT.		
480	CLAMP PROFILE CONNECTOR 40 (SET)	889
Į.	MOUNTING FOR CLAMP PROFILE CONNECTOR 40 (SET)	890
	SAFETY HANGER 8/8 (SET)	891
	SUPENSION BRACKET (SET)	892
0-0-00	SUPENSION BRACKET CS (SET)	893
Z O	HANGER 6-8 (SET)	894
-	WIRE MESH CLAMP	895
121	WIRE MESH PANEL HOLDER (SET)	896
J	WIRE MESH CLAMPING PLATE	897




CLAMP PROFILE CONNECTOR 40 (SET)

MODELZinc die-cast, profile 40DESCRIPTIONTo connect two aluminum profiles at right angles and to attach a frame element to a frame structure by means of a suitable mounting; the upper monting defines the position in the structure, by shifting the lower mouting afterwards the frame can be fixed and lockedMATERIALClamp profile connector: Zinc die-cast Screws: SteelSURFACEClamp profile connector: Powder coated Screws: Zinc platedCOLORClamp profile connector: Alu colorSET1 clamp profile connector, 2 screws DIN EN ISO 4762 (DIN 912) - M8 x 20

PACK QUANTITY 10 sets

TIP Compatible Mounting for Clamp Profile Connector 40 (Set) see 093XWWC401N08







Part #	Profile	Weight [g]	N
093WWC401N08S01	1	201.0	8



MOUNTING FOR CLAMP PROFILE CONNECTOR 40 (SET)

MODEL Steel, slot 8

DESCRIPTION To attach frame elements to a frame structureby means of clamp profile connectors 40; completely preassembled, for lateral insertion into the profile slot, fixation by means of a nut; the upper monting defines the position in the structure, by shifting the lower mouting afterwards the frame can be fixed and locked; 12 mm gap between frame and structure, dimensional tolerances of +/- 3 mm can be com-

pensated

MATERIAL T-slot nut: Steel

Shim: Steel Nut: Steel Screw: Steel Ball: Stainless steel

SURFACE T-slot nut: Zinc plated

Shim: Zinc plated Nut: Zinc plated Screw: Zinc plated

Ball: Plain


SET Mounting, completely preassembled:


1 T-slot nut - slot 8 - M6, 1 shim DIN 9021 - 6.4, 1 nut DIN 934 - M6, 1 screw DIN 7984 - M6 x 30,

1 ball Ø 4


PACK QUANTITY 10 sets

Compatible Clamp Profile Connector 40 (Set) see 093WWC401N08S01









Part #	Profile	Weight [g]	Slot
093XWWC401N08	1	16.0	8

©2024 | fath24.com


12 T-slot nuts - slot 8 - M8



SAFETY HANGER 8/8 (SET)

MODEL Steel, zinc plated, Slot 8 **DESCRIPTION** To comfortably hang on protective frame panels, according to Machinery Directive 2006/42/EC; gap distance 12 - 26 mm MATERIAL Hanger: Steel Supporting hook: Steel Supporting angle: Steel Countersunk screws: Stainless steel T-slot nuts: Steel SURFACE Hanger: Zinc plated Supporting hook: Zinc plated Supporting angle: Zinc plated Countersunk screws: Plain T-slot nuts: Zinc plated **SET** 2 hangers incl. calked safety fastening with pin, 2 supporting hooks, 2 supporting angles, 12 countersunk screws DIN 7991 - M8 x 16 - with pin,

PACK QUANTITY 1 set

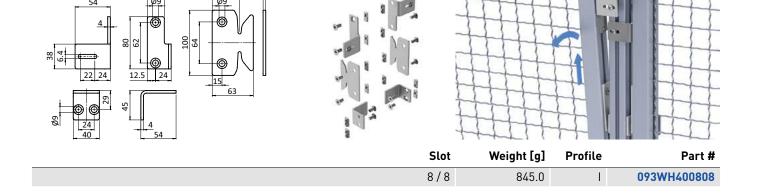





SUPENSION BRACKET (SET)

MODEL	Zinc die-cast, slot 10						
DESCRIPTION	o attach a protective frame panel between two posts						
MATERIAL	Suspension Bracket: Zinc die-cast, Assembly set: Steel						
SURFACE	Suspension Bracket: Plain, Assembly set: Zinc plated						
SET	4 suspension brackets, 4 flange nuts M8, 4 hammer head screws M8 x 20, 2 locking screws - Verbus Ripp B - M8 x 16, 2 knurled pins Ø 8.6, for core hole						

PACK QUANTITY 1 set

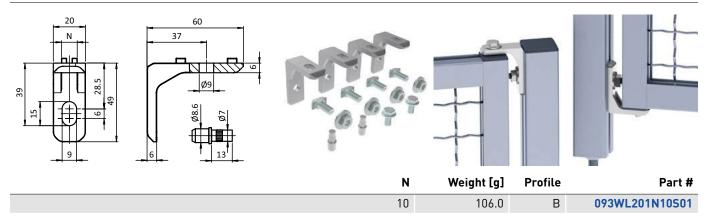

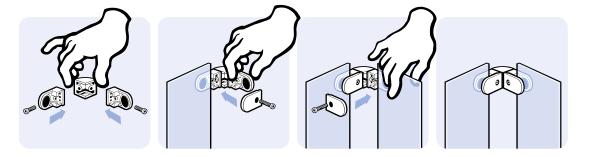



SUPENSION BRACKET CS (SET)

MODEL Zinc die-cast, slot 10 **DESCRIPTION** To attach a protective frame panel betweentwo posts, according to Machinery Directive 2006/42/EC MATERIAL Suspension Bracket: Zinc die-cast Assembly set: Steel Safety strap: Plastic PA Anti-loss washer: Plastic PA SURFACE Suspension Bracket: Plain, Assembly set: Zinc plated COLOR Safety strap: Black, Anti-loss washer: Natural SET 2 suspension brackets,

2 suspension brackets cs pre-assembled,

2 knurled pins Ø 8.6, for core hole,


2 locking screws - Verbus Ripp B - M8 x 25,


2 safety straps, 2 anti-loss washers,

4 hammer head screws M8 x 20,

4 flange nuts M8

PACK QUANTITY 1 set

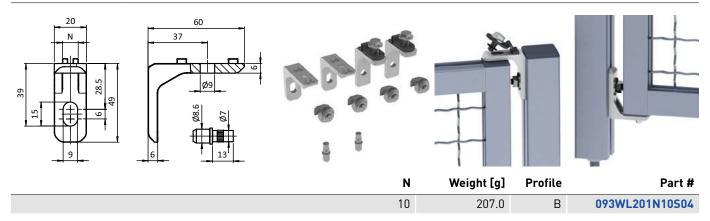

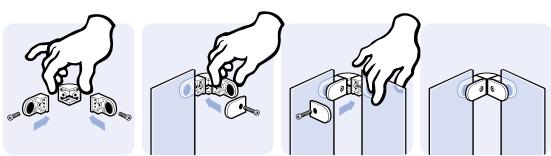




HANGER 6-8 (SET)

MODEL	Zinc die-cast
DESCRIPTION	For an extra sturdy fastening of panels to fencing posts
MATERIAL	Zinc die-cast
SURFACE	Powder coated
COLOR	Black
PACK QUANTITY	10 pieces



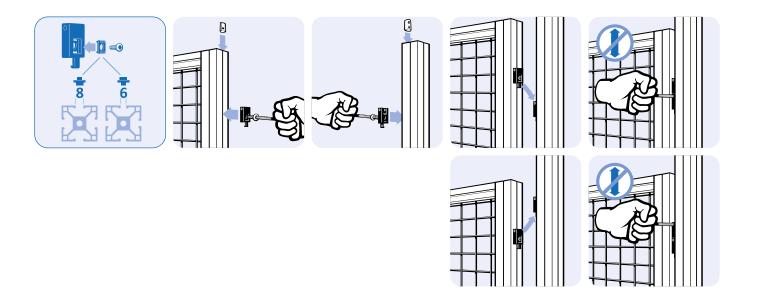



WIRE MESH CLAMP

MODEL Zinc die-cast, slot 8, 10

DESCRIPTION To fix protective wire mesh panels, clamping range 3 up to 5 mm (straight grate up to 5 mm, wave grate

up to 4 mm), can be assembled on profiles with slot 8 and slot 10

MATERIAL Zinc die-cast


SURFACE Zinc plated

PACK QUANTITY 10 pieces

SPECIALS Other surfaces, other colors on request



Weight [g] Part # 20.0 093CWM35N0810

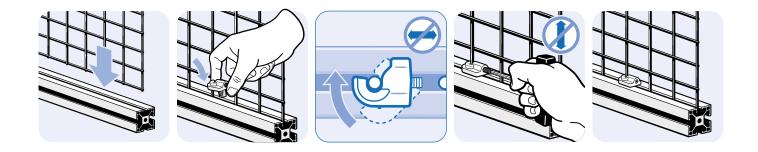



WIRE MESH PANEL HOLDER (SET)

MODEL	Aluminum, with backing plate
DESCRIPTION	To attach panels easily to aluminum profiles
MATERIAL	Aluminum
SURFACE	Anodized
SET 1	1 wire mesh panel holder, 1 mounting plate

PACK QUANTITY 10 sets



B [mm]	H [mm]	L [mm]	T [mm]	a [mm]	for Profile	P/D [mm]	t [mm]	М	S [mm]	Weight [g]	Part #
20.0	39.0	6.0	10.0	9.0	20	5.5	3.0	M5	7.4	14.5	093P20LN
30.0	68.0	10.0	15.0	17.0	30	9.0	6.0	M8	11.0	41.4	093P30LN
40.0	78.0	13.5	20.0	17.5	40	9.0	6.0	M8	16.0	82.0	093P40LN
45.0	88.0	18.0	22.5	17.5	45	9.0	6.0	M8	17.5	105.0	093P45LN

Engineering Components | Enclosures, Guards and Partitions



WIRE MESH CLAMPING PLATE

 MODEL
 Plastic PA

 DESCRIPTION
 To attach handles, warning signs or information boards to woven wire mesh 40 x 40 x 4 and 30 x 30 x 3, e.g. form the front with screw and from the back with flange nut and shim


 MATERIAL
 Plastic PA, glass ball reinforced


 COLOR
 Black

PACK QUANTITY 10 pieces


SPECIALS Other colors on request

TIP * Please note: You need each two pieces 093048!











Weight [g]

Part #

14.0